



Hand Operated Curtain Track Systems





Hand Operated Curtain Track System

Silent Gliss® 1012

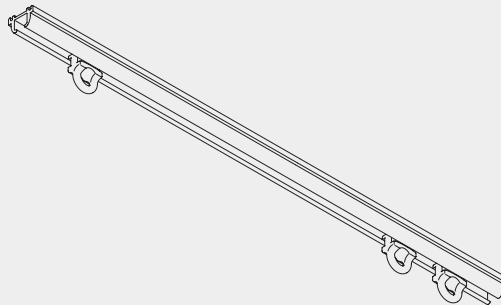


Product Information

- Hand operated curtain track for light curtains and nets
- Especially suitable for trucks, boats, caravans, etc
- Thin, elegant and bendable ceiling fix profile with special concrete-fixing supports where appropriate
- Quick fixing to wood with special Silent Gliss 7550 centre tool
- Pre-drilled every 120mm
- Standard colour: silver
- Standard profile length 6m, (profile connector for longer lengths)
- Can be bent



1012

Profile, Bending and Specification Information



1012




Can only be bent to two radii -
60mm or 100mm

Specification guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 1012 curtain track, hand-drawn, anodised aluminium, complete with gliders 3533 at 16/m. 2 endstops 3016 per length, top fixed to timber (by others) at 360mm. centres with special screw 3019.Lm. State colour.


Fitting Information

Fixing points



The fixing distances are meant as a guide only: they may vary in practice depending on surface and curtain weight.

Silent Gliss Tools 7550 makes fitting to wood more efficient and eliminates damage to the track.



A



B



C

- A: Centre tool 7550
- B: Screw 3019 / 12mm
- C: Screw 3025 / 18mm

The screws above are for fixing to wood.


When fixing to concrete, screws 2021 will be provided.



1012


Fitting Options

Ceiling fix to timber with single profile





The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Ceiling fix to timber with two or multiple profiles



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Fixing to concrete ceilings with support 3112



The final distances may be outside of the recommendations above depending on curtain heading, make-up and any obstructions. Batten thickness depends on length of screw.

Standard Accessories

1012 Profile



3016 Endstop



3019 Special screw - 12mm (standard for timber)




3112 Concrete fixing support (std for concrete)



3534 Glider 3533 in strip form



7002 Profile protector



1012

Optional Accessories

3025 Special screw (18mm)



3032 Spring stop



3064 Connecting bridge



3070 Twist eye endstop



3071 Screw twist endstop



3511 Glider



3533 Glider



3548 Retrofit glider



3570 Rotating glider



10430 Draw rod with hook, 50cm



10431 Draw rod with hook, 75cm



10432 Draw rod with hook, 100cm



10433 Draw rod with hook, 125cm



10434 Draw rod with hook, 150cm



Useful Information and Sewing Accessories




Diagram uses standard 3533/3534 glider and is measured to the inside of the glider eye. For optional gliders substitute dimensions below:

3570 = 6.0mm

3548 = 6.5mm

3068 Loop tape



3562 Standard tape



3571 Hook



3582 Hook



3599 Hook




Useful Measurements



1012

3064 Connecting bridge





1012

www.silentgliss.co.uk

www.silentglissglobal.com

Silent Gliss Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 863571
Fax: +44 (0) 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd
Pyramid Business Park
Poorhole Lane
Broadstairs
Kent
CT10 2PT
Great Britain

Tel: +44 (0) 1843 874250
Fax: +44 (0) 1843 874457
info@silentglissglobal.com